

# VR Paver Pedestal


PAVER PEDESTAL  
FOR USE WITH VR PAVERS

## PRODUCT DESCRIPTION

**Description** Paver Pedestals for use with VR Pavers

**Options** PPF  
PP1 - PP9

**Accessories** PP-SH1 - PP-SH2  
PP-SHS  
PP-T3.5 - PP-T10

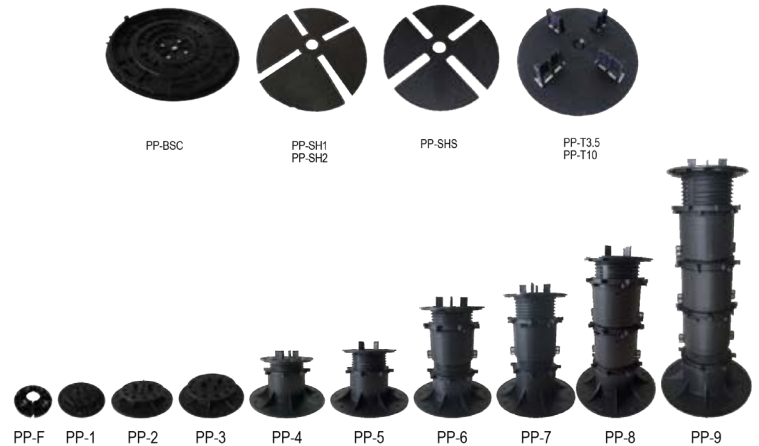

## PRODUCT PROPERTIES

Model	Height	Composition
PP-F	Fixed 0.5 in (12.5 mm)	1 Stackable Fixed Height Paver Pedestal
PP-1	Adjustable 1 in - 1.25 in (25 mm - 40 mm)	1 Head/Base + 1 Spacer Tab + 1 Shim
PP-2	Adjustable 1.25 in - 2.5 in (40 mm - 65 mm)	1 Head/Base + 1 Spacer Tab + 1 Shim
PP-3	Adjustable 2.25 in - 3.5 in (60 mm - 85 mm)	1 Head/Base + 1 Spacer Tab + 1 Shim
PP-4	Adjustable 3.25 in - 5 in (80 mm - 130 mm)	1 Base + 1 Fix Collar/Head + 1 Spacer Tab + 1 Shim
PP-5	Adjustable 5 in - 6.75 in (130 mm - 175 mm)	1 Base + 1 Fix Collar/1 Head + 1 Spacer Tab + 1 Shim
PP-6	Adjustable 6.75 in - 10.5 in (175 mm - 270 mm)	1 Base + 1 Extender/Fix Collar + 1 Fix Collar/Head + 1 Spacer Tab + 1 Shim
PP-7	Adjustable 8.5 in - 12.5 in (210 mm - 320 mm)	1 Base + 1 Extender/Fix Collar + 1 Fix Collar/Head + 1 Spacer Tab + 1 Shim
PP-8	Adjustable 11.75 in - 18 in (300 mm - 460 mm)	1 Base + 2 Extender/Fix Collar + 1 Fix Collar/Head + 1 Spacer Tab + 1 Shim
PP-9	Adjustable 14.5 in - 23.5 in (370 mm - 600 mm)	1 Base + 3 Extender/Fix Collar + 1 Fix Collar/Head + 1 Spacer Tab + 1 Shim

## Accessories

PP-SH1	1/32 in (1mm thick) Anti-slip Rubber Shim
PP-SH2	1/16 in (2mm thick) Anti-slip Rubber Shim
PP-SHS	0-5% Sloped Rubber Shim
PP-BSC	0-5% Base slope Corrector
PP-T3.5	1/8 in (3.5 mm) Wide Spacer Tabs
PP-T10	5/8 in (10 mm) Wide Spacer Tabs

## Tremco Incorporated

UNITED STATES  
3735 Green Road  
Beachwood, Ohio 44122  
T: 1.800.562.2728

CANADA  
50 Beth Neelson Drive  
Toronto, Ontario M4H 1M6  
T: 1.800.668.9879

# PRODUCT SPECIFICATION DATA SHEET

## VR Paver Pedestal

PAVER PEDESTAL  
FOR USE WITH VR PAVERS

**Material** Polypropylene (PP)

### Dimensions

**Head Diameter** 5.5" (140 mm)  
**Extender Diameter** 3.9" (100 mm)  
**Thickness** 0.18" (4.5-6 mm)  
**Height** Refer To Page 1

**Axial Compression** >4380 lbf (>19485.3 N)

**Temperature Range** -40 - 248 (-40 - 120 )

### Anti-UV Aging

**Before Aging** 4380 lbf (19483.4 N)  
**After 500 hr Aging** 4128.6 lbf (18365.2 N)

### GUARANTEE / WARRANTY

Tremco Incorporated warrants VR Paver Pedestal to be free of defects and to meet published physical properties when tested according to ASTM and Tremco standards. Under this warranty, any VR Paver Pedestal product that is proved to be defective when applied in accordance to our written instructions, and in applications recommended by Tremco as suitable for this product will be replaced with like product at no charge.

THIS IS BUYER'S SOLE AND EXCLUSIVE REMEDY.

All claims concerning product defects must be made in writing within twelve (12) months of shipment. The absence of such claims in writing during this period will constitute a waiver of all claims with respect to such product. This warranty shall be IN LIEU OF any other warranty, express or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

© 2020 Tremco Incorporated



**Tremco Incorporated**  
www.tremcoinc.com

**UNITED STATES**  
3735 Green Road  
Beachwood, OH 44122  
1.800.562.2728

**CANADA**  
50 Beth Neelson Drive  
Toronto, ON M4H 1M6  
T: 1.800.668.9879

Tremco Roofing & Building Maintenance is a part of the Tremco Construction Products Group