

TremLock[®] 565 Panel

Concealed Fastener Wall Panel

FEATURES

- 3" Rib lengths
- Long lengths

BENEFITS

- Strong panel
- Available up to 40'



DESCRIPTION

TremLock 565 Panels are a concealed fastener wall panel combining both aesthetics and strength. The bold profile will add curb appeal to most any project while adding weathertight characteristics.

BASIC USES

TremLock 565 Panels are concealed fastener wall panels to be installed over plywood, hat section, mac-girts, or wall girts.

SYSTEM DESIGN

TremLock 565 Panels have 16" cover width and 3" rib height while providing the engineering and weathertight characteristics demanded by architects and building owners.

FINISH/COLOR



Acrylic-coated Galvalume
Fluoropolymer (Kynar 500 PVDF resin based)
Oil canning is inherent in all metal panels and is not cause for rejection.

APPLICATION


Commercial walls

SECTION PROPERTIES & PROFILES


TremLock 565 Profile:

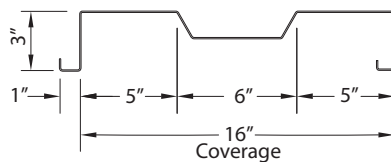


Foam Outside Closure:




TremLock 565 Seam (w/ 16 GA. Clip Attachment):

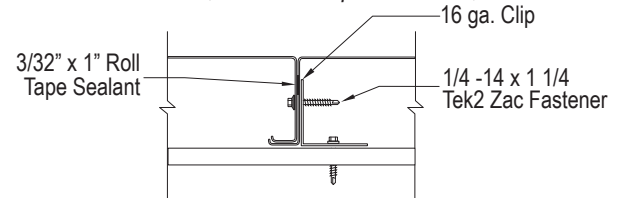

TremLock 565 Seam (w/ Fablok Fastener Attachment):

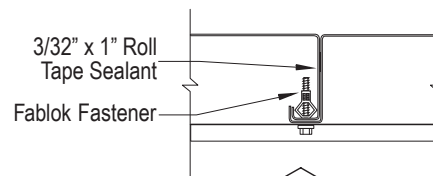

Foam Inside Closure:



PHYSICAL PROPERTIES

TITLE OF TEST

Air Infiltration

Water Penetration

TEST METHOD

ASTM E283

ASTM E331

All testing conducted with a Galvolume[®] substrate.

TremLock® 565 Panel

MAINTENANCE

Your local Tremco Roofing sales representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

TECHNICAL SUPPORT

Your local Tremco Roofing sales representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013

50 Beth Neelson Drive
Toronto, Ontario M4H 1M6
1.800.668.9879

Tremco is a US Registered trademark of Tremco Incorporated.

The information provided on this data page supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.

TremLock® is a U.S. registered trademark of Tremco Incorporated.
Kynar 500® is a U.S. registered trademark of Arkema Inc.
Hylar 5000® is a U.S. registered trademark of Solvay Solexis, Inc.
Galvalume® is a U.S. registered trademark of BIEC International Inc.
Fluoropon® is a U.S. registered trademark of SWIMC LLC.