

TremLock® R-Panel

Standing Seam Metal Roof System



FEATURES

Versatile

Span

BENEFITS

- Multi-use roof and wall panel
- Can span open framing

DESCRIPTION

TremLock "R" panel is a multi-use roof and wall panel used primarily in pre-engineered metal building applications.

BASIC USES

TremLock "R" panel is an exposed roof and wall panel. TremLock "R" panel can be used as an exterior wall cover or roof panel, excellent for use on screen walls, equipment screens and parapet wall applications. A variety of fastener options are available to meet the needs of appearance and different substrate attachment. An optional purlin bearing leg (PBR) rests on purlins and provides support for fastening to the panel lap.

SYSTEM DESIGN

TremLock "R" panels are designed 38 1/4" wide with a coverage of 36" and up to 40' in length with four major corrugations; 1 1/4" high 12" on center with two minor corrugations between each of the ribs, the entire length of panel.

FINISH/COLOR


Acrylic Coated Galvalume®
 Fluoropolymer (Kynar 500® PVDF resin-based)
 Siliconized Polyester and Polyester
 Oil canning is inherent in all metal panels and is not cause for panel rejection.

APPLICATION

TremLock "R" Plus panel is an exposed fastener wall / roof panel used on slopes down to 1:12. Tape sealant is required on seam (side-laps). Standard panel lengths up to 40'. Please inquire for longer lengths.

PANEL OPTIONS

R-Panel Profile (Non-Purlin Bearing Leg):

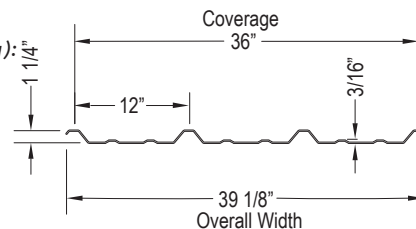

Foam Inside Closure:




Foam Outside Closure:



Fastener Pattern

(@ Eaves, Ridges & Endlaps):


- 1/4-14 x 7/8" LAP TEK ZAC Fastener (1'-8" O.C. Max)
- 3/32" x 1" Roll Tape Sealant (Required on 3:12 or Less Slopes)



Fastener Pattern

(@ Intermediate Spacings):

- 1/4-14 x 7/8" LAP TEK ZAC Fastener (1'-8" O.C. Max)
- 3/32" x 1" Roll Tape Sealant (Required on 3:12 or Less Slopes)



TremLock® R-Panel

TESTING

TITLE OF TEST	TEST METHOD
Fire Rating:	UL 263, UL 790 Class A
Uplift Testing:	UL580 Class 90, ASTM E1592 (PBR 26 g. & 24 ga only)
Impact Resistance:	UL 2218 Class 4
Florida State Approval	FL 1747.9 & FL 1832.11-R. FL 12951.1 - PBR
Miami Dade Approval	
Texas Windstorm	RC-284 (PBR only)

MAINTENANCE

Your local Tremco Roofing sales representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

TECHNICAL SUPPORT

Your local Tremco Roofing sales representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013

50 Beth Neelson Drive
Toronto, Ontario M4H 1M6
1.800.668.9879

Tremco is a US Registered trademark of Tremco Incorporated.

The information provided on this data page supersedes all previous data concerning this product and its application. The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.

TremLock® is a U.S. registered trademark of Tremco Incorporated.
Kynar 500® is a U.S. registered trademark of Arkema Inc.
Hylar 5000® is a U.S. registered trademark of Solvay Solexis, Inc.
Galvalume® is a U.S. registered trademark of BIEC International Inc.
Fluoropon® is a U.S. registered trademark of SWIMC LLC.