TremLock® S Panel

Exposed Fastener Panel

FEATURES

Versatile

Greater than normal spans and load carrying

BENEFITS

- Wall, roof or interior accent panel
- High strength performance capabilities



DESCRIPTION

TremLock "S" panels were designed and engineered with greater-than-normal spans and load-carrying characteristics in mind. And, they quickly communicate their high-strength performance capabilities.

BASIC USES

TremLock 'S" panel is an exposed roof and wall panel. TremLock "S" panel can be used as an exterior wall cover or roof panel, excellent for use on screen walls, equipment screens and parapet wall applications. A variety of fastener options are available to meet the needs of appearance and different substrate attachment.

SYSTEM DESIGN

TremLock "S" panels are designed 33 1/2" wide with a coverage of 31 3/8" and up to 50' in length. The TremLock "S" panel is .875" high with 2" corrugations between each of the major corrugations the entire length of panel.

FINISH/COLOR

Acrylic-coated Galvalume®

Fluoropolymer (Kynar 500° PVFD resin-based)


Siliconized Polyester and Polyester

Oil canning is inherent in all metal panels and is not cause for rejection.

APPLICATION

Exposed fastener wall/roof panel used on slopes down to 1:12. Tape sealant is required on seam (sidelaps). Standard panel lengths up to 50'. Please inquire for longer lengths.

PANEL PROFILES

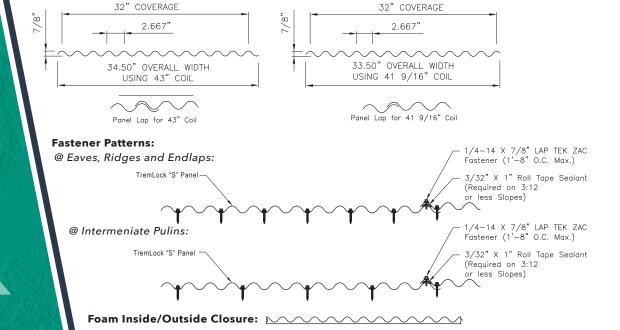

TremLock® S Panel

TESTING

TEST METHOD

Fire Resistance UL 790 Class A

Uplift Testing UL 580 Class 90

Impact Testing UL 2218 Class 4

Florida State Approval FL 10680.1 (non-structural)

Texas Windstorm: RC-158

TITLE OF TEST

Your local Tremco Roofing Sales Representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

Your local Tremco Roofing Sales Representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.

MAINTENANCE

PRECAUTIONS
TECHNICAL SUPPORT



www.tremcoroofing.com 3735 Green Road Beachwood, Ohio 44122 1.800.852.6013

50 Beth Nealson Drive Toronto, Ontario M4H 1M6 1.800.668.9879 Tremco is a US Registered trademark of Tremco Incorporated

The information provided on this data page supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, ATTREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.