

# TremLock® CFL Panel

## Standing Seam Metal Roof System



### FEATURES

- Nail tab
- Snap seam

### BENEFITS

- No clips needed
- Eliminates seaming

### DESCRIPTION

TremLock CFL Panel is a factory roll formed metal roof system that is manufactured from standard - 24 GA. or 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare, AZ50 - Painted. 16" Minor Rib or Striated - 24 or 26 ga. 12" Minor Rib or Striated - 24 ga. only

### BASIC USES

The TremLock CFL Panel is a light commercial roof panel.

### SYSTEM DESIGN

TremLock CFL Panel may be applied over a substrate of plywood or rigid Insulation/metal deck.


### FINISH/COLOR

Acrylic Coated Galvalume®, Fluoropolymer (Kynar 500® PVDF resin-based). Oil canning is inherent in all metal panels and is not cause for panel rejection.

### APPLICATION

Snap Seamed roof panel used on slopes down to 3:12. Standard panel lengths up to 45'. Please inquire for longer lengths.

### SECTION PROFILES

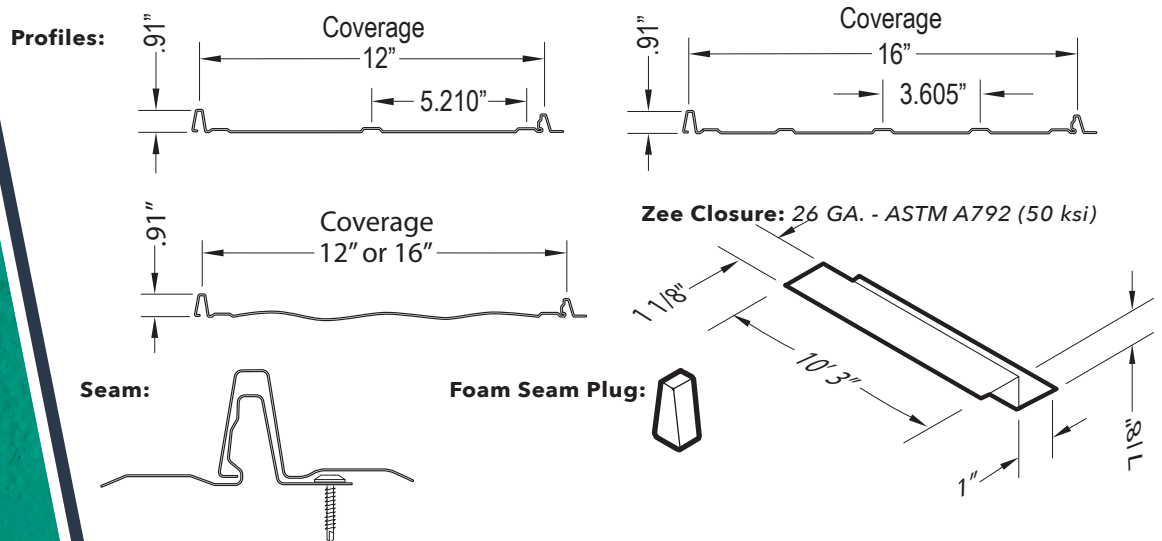

### PHYSICAL PROPERTIES

TITLE OF TEST	TEST METHOD
Uplift	UL 580 Class 90
Air & Water Infiltration	ASTM E1680, and ASTM E1646
Fire Resistance	UL 790 Class A
Impact Testing	UL2218 Class 4
Florida Product Approval	FL 2358.1
Texas Windstorm	RC-34

\*Testing and Approvals are product specific. Please inquire for details.

# TremLock® CFL Panel

## MAINTENANCE

Your local Tremco Roofing Sales Representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

## PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

## TECHNICAL SUPPORT

Your local Tremco Roofing Sales Representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



Roofing & Building Maintenance

[www.tremcoroofing.com](http://www.tremcoroofing.com)

3735 Green Road  
Beachwood, Ohio 44122  
1.800.852.6013

50 Beth Neelson Drive  
Toronto, Ontario M4H 1M6  
1.800.668.9879

Tremco is a US Registered trademark of Tremco Incorporated.

The information provided on this data page supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.

TremLock® is a U.S. registered trademark of Tremco Incorporated.

Kynar 500® is a U.S. registered trademark of Arkema Inc.

Hylar 5000® is a U.S. registered trademark of Solvay Solexis, Inc.

Galvalume® is a U.S. registered trademark of BIEC International Inc.

Fluoropon® is a U.S. registered trademark of SWIMC LLC.