


TremPly® TPO Coated Metal Sheets

An Accessory Designed for TremPly TPO Single Ply Roof Systems

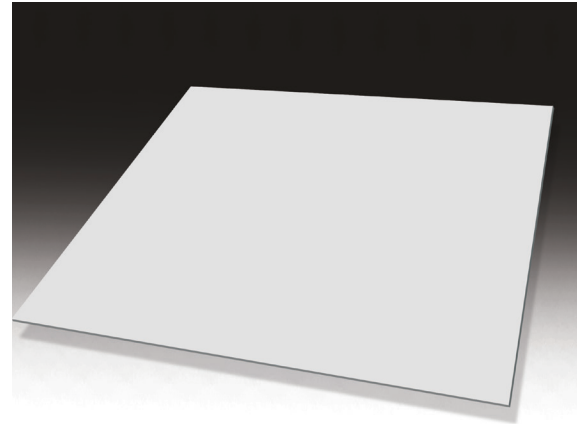

FEATURES

- Cost effective
- Factory-built accessories
- Uniform look

BENEFITS

- Reduces installed costs
- Improved reliability, reduces risk of leaks and callbacks
- Improved aesthetics

DESCRIPTION

TremPly® TPO Coated Metal Sheets are constructed with TPO membrane laminated to galvanized sheet metal.

BASIC USES

For metal gravel stop and drip edges, metal base and curb flashing, sealant pans, and scupper sleeves. Field and flashing TPO membrane heat welds directly to coated metal. 24-gauge steel with a 25-mil thick membrane film cuts and forms like standard sheet metal. Available in both TremPly and TremPly Max TPO.

COLOR

White (Allow 2 - 4 weeks lead time)

PACKAGING

Up to 30 sheets per pallet.

- 20-gauge Galvanized - 60 lb. (27.22 kg)/sheet
- 25-mil TPO and 20-gauge galvanized steel

APPLICATION

TremPly TPO accessories are designed for use with TremPly TPO single ply membranes. The accessories may be installed on mechanically attached, fully adhered or self adhered TremPly TPO roofing systems using conventional techniques. See published application and specifications manual for detailed instructions.

MAINTENANCE

Your local Tremco Roofing Sales Representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

TECHNICAL SUPPORT

Your local Tremco Roofing Sales Representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013

50 Beth Nealson Drive
Toronto, Ontario M4H 1M6
1.800.668.9879

Tremco Roofing & Building Maintenance is a part of the Tremco Construction Products Group

Tremco is a US Registered trademark of Tremco Incorporated. The information provided on this data page supersedes all previous data concerning this product and its application. The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.