

# TremLock® Flexx

## Concealed fastener interlocking wall panel

### FEATURES

- Concealed fastener
- Versatile panel

### BENEFITS

- Clean design
- Install vertically or horizontally



### DESCRIPTION

TremLock Flexx wall panel system is factory roll formed 24 or 22 gauge. Galvalume® steel, zinc coated by hot-dip process per ASTM A792/A792M. The Galvalume panel is coated with Kynar 500® / Hylar 5000®. Refer to color chart for available colors.

### BASIC USES

TremLock Flexx wall panels are a concealed fastener wall panel that can be used in exterior wall cover and parapet wall applications. A variety of fastener options are available to meet the needs different substrate attachment.

### SYSTEM DESIGN

TremLock Flexx wall panels are designed with coverage of 16" wide and up to 40' in length. The TremLock Flexx wall panel is 3/4" high with a 4" rib spacing. The TremLock Flexx wall panel can be installed horizontally or vertically.

### FINISH/COLOR


Acrylic Coated Galvalume®.  
Fluoropolymer (Kynar 500® PDVF resin-based).  
Oil canning is inherent in all metal panels and is not cause for rejection.

### APPLICATION


TremLock Flexx wall panels are a concealed fastener, interlocking panel (symmetrical or horizontal ribs) used on wall applications.

### PANEL OPTIONS


#### Flexx Fixed Profile:

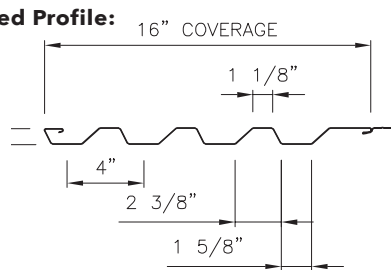


#### Flexx Floating Profile:

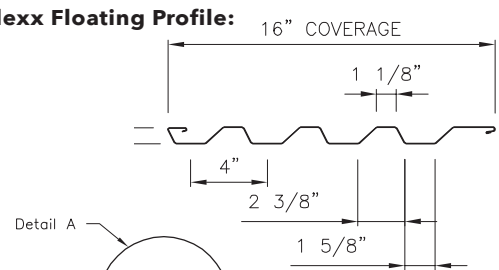

#### Seam Engagement (Fixed):



#### Seam Engagement (Floating):

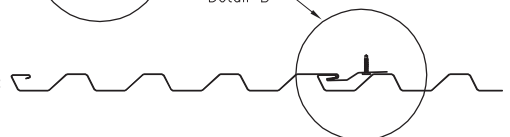

### TESTING

TITLE OF TEST	TEST METHOD
Uplift	ASTM E1592

### MAINTENANCE

Your local Tremco Roofing sales representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

### PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

# TremLock® Flexx

## TECHNICAL SUPPORT

Your local Tremco Roofing sales representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



Roofing & Building Maintenance

[www.tremcoroofing.com](http://www.tremcoroofing.com)

3735 Green Road  
Beachwood, Ohio 44122  
1.800.852.6013

50 Beth Neelson Drive  
Toronto, Ontario M4H 1M6  
1.800.668.9879

Tremco is a US Registered trademark of Tremco Incorporated.

The information provided on this data page supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.

TremLock® is a U.S. registered trademark of Tremco Incorporated.

Kynar 500® is a U.S. registered trademark of Arkema Inc.

Hylar 5000® is a U.S. registered trademark of Solvay Solexis, Inc.

Galvalume® is a U.S. registered trademark of BIEC International Inc.

Fluoropon® is a U.S. registered trademark of SWIMC LLC.